



# Sauna heater Bi-O Mini

## For the small sauna

Outer shell: bright high-grade steel  
 Inner shell: bright high-grade steel  
 Water container: for approx. 2 litres  
 Stone basket: high-grade steel  
 Stone filling: 8 kg incl.

Fixed connection to the mains with control unit.  
 Electrical low-water monitor incl. Dry-running protection and low-water buzzer.  
 Incl. 2.5 m cable mounted to the heater.


### Connection diagram

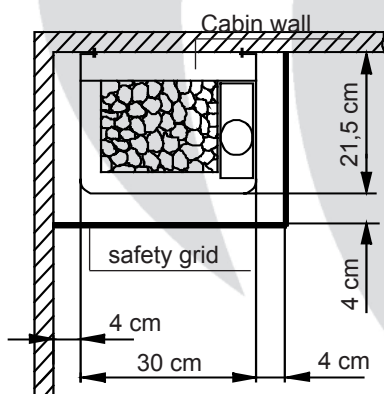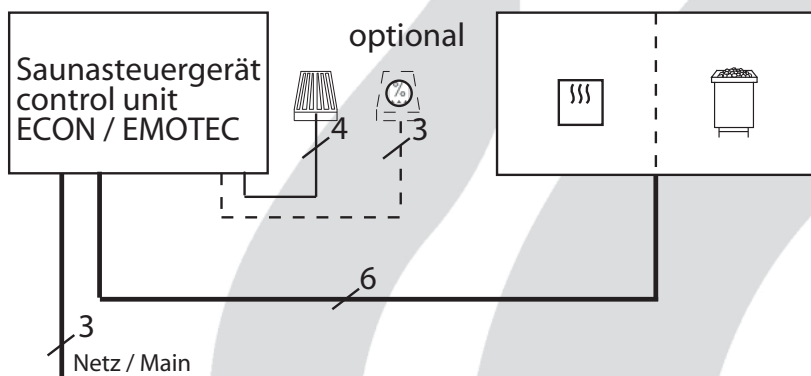

## Wall mounted heater with vaporiser



CE IP x4 AR 60  
 MADE IN GERMANY

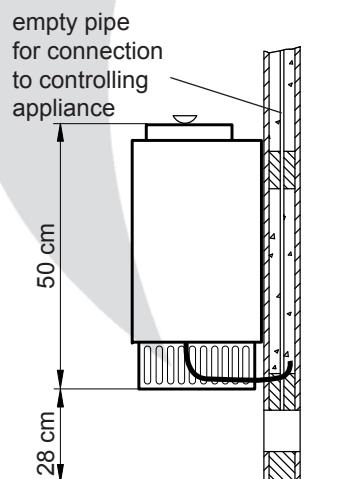

Art.-No.	Outer shell	Capacity acc. DIN	Vaporiser -capacity -volume	Electrical. Connection	Fuse control unit in A	Installation dimensions H/W/D cm	For cabin size	Minimum dimensions of air intake and exhaust vents	Weight without stones without package	Stone filling	Connecting cable main - control unit in mm <sup>2</sup>	Connecting cable control unit - heater in mm <sup>2</sup>	For operation with control units
94.5018	high-grade steel	2,5 kW	0,75 kW 2 l	N AC 50 Hz 230 V	1 x 16	78 / 30 / 21,5	3 - 5 m <sup>3</sup>	20 x 4 cm	9,2 kg	8 kg	3 x 1,5	6 x 1,5	ECON H1 ECON H2 EMOTEC HCS 9003 EMOTEC HCS 9003 DB/ DL/DLF EmoTouch II PB/AF/GF InfraTouch I AF
94.2444		3,0 kW											

All cross sections of a line are minimum diameters in mm<sup>2</sup> (Copper line)

Subject to technical modifications